

COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS
PROJECT NUMBER 2016-04
NW SUWANNEE VALLEY RD – ROADWAY IMPROVEMENTS

BID PROPOSAL

THE UNDERSIGNED hereby propose to furnish all materials, labor and supervision for the construction of the subject project including conformance with the construction requirements and specifications for the following unit prices:

	ITEM	UNIT	QUANTITY	UNIT PRICE	TOTAL
1	Mobilization	LS	1	\$ 91,613.00	\$ 91,613.00
2	Maintenance of Traffic	LS	1	\$ 67,728.00	\$ 67,728.00
3	Staked Silt Fence	LF	500	\$ 1.55	\$ 775.00
4	Milling, 1 1/2"	SY	2,222	\$ 3.47	\$ 7,710.34
5	Mixing Existing Pavement	SY	56,356	\$ 1.00	\$ 56,356.00
6	Limerock Base, 4" (Loose Measure)	CY	6,256	\$ 21.10	\$ 132,001.60
7	Subsoil Excavation	CY	650	\$ 8.72	\$ 5,668.00
8	Borrow Material	CY	800	\$ 14.94	\$ 11,952.00
9	Grading and Finishing (Roadway & Shoulder)	LS	1	\$ 113,552.33	\$ 113,552.33
10	Asphaltic Concrete SP 12.5 @ 150 lb/sy	TN	4,879	\$ 91.80	\$ 447,892.20
11	Asphaltic Concrete SP 9.5 @ 110 lb/sy	TN	3,578	\$ 92.80	\$ 332,038.40
12	Pipe Culvert, RCP, Elliptical, 14" x 23", C/D	LF	96	\$ 99.28	\$ 9,530.88
13	Pipe Culvert, RCP, Elliptical, 19" x 30", C/D	LF	56	\$ 112.55	\$ 6,302.80
14	Pipe Culvert, RCP, Round, 30", (Extension)	LF	12	\$ 180.20	\$ 2,162.40
15	Pipe Culvert, CMP, Round, 48", (8 Extensions)	LF	96	\$ 189.10	\$ 18,153.60
16	Pipe Culvert, CMP, Round, 18" X 40', S/D	EA	5	\$ 2,075.00	\$ 10,375.00
17	Mitered End Section, Elliptical or Round, 18"	EA	14	\$ 605.52	\$ 8,477.28
18	Mitered End Section, Elliptical, 24"	EA	2	\$ 605.52	\$ 1,211.04
19	Concrete Endwall, Class I, Single 30"	EA	1	\$ 4,208.43	\$ 4,208.43
20	Concrete Endwall, Class I, Double 48"	EA	4	\$ 7,966.40	\$ 31,865.60
21	Sod Strip 42"	SY	19,725	\$ 1.90	\$ 37,477.50
22	Seed and Mulch	LS	1	\$ 5,670.00	\$ 5,670.00
23	Pavement Markings	LS	1	\$ 48,710.00	\$ 48,710.00

Contractor Signature : 
 E. Tony Williams, Jr., Vice President

TOTAL	\$1,451,431.40
--------------	-----------------------

PAY ITEM NOTES

- Item 2** - Shall include all elements required per FDOT standards and include temporary centerline/stop bar delineation at all non working times, stationing, offsets, and any edge of pavement reclamation where required.
- Item 3** - Shall be placed at all areas of potential stormwater runoff as directed by the Engineer.
- Item 4** - Shall include removal of existing asphaltic concrete down to existing limerock base and then sweep existing limerock base for engineer visual inspection. Cores show +/- 1.5" of asphalt. Columbia County will retain ownership of millings. Contractor will deliver millings to Columbia County Public Works Site, off CR 25A, at Columbia County Parcel # 19-3S-17-05099-000.
- Item 5** – Average depth shall be 10 inches and shall be achieved with a milling machine or engineer approved equivalent.

**COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS
PROJECT NUMBER 2016-04
NW SUWANNEE VALLEY RD – ROADWAY IMPROVEMENTS**

- Item 6** – Shall include 4" limerock, loose measure, placed by mechanical spreader before mixing begins.
- Item 9** – Includes all construction layouts required, scarifying, shaping, compacting, finishing, and priming for placement of asphalt and placement of sod.
- Item 12** – Quantity includes constructing (2) Pipe Culvert, RCP, Elliptical, 14" x 23", C/D @ 48 lf. Pipe length includes mitered end section pipe. Concrete portion of mitered ends will be paid for under **Item, 17 Mitered End Section, Elliptical or Round, 18", EA.**
- Item 13** – Quantity includes constructing (1) Pipe Culvert, RCP, Elliptical, 19" x 30", C/D @ 56 lf. Pipe length includes mitered end section pipe. Concrete portion of mitered ends will be paid for under **Item, 18 Mitered End Section, Elliptical, 24", EA.**
- Item 16** – Each side drain shall have mitered ends on each end. Pipe length includes mitered ends sections' pipe length for a total of 40 feet. Concrete portion of mitered ends will be paid for under **Item, 17 Mitered End Section, Elliptical or Round, 18", EA.**
- Item 19** – Contractor may elect to salvage existing endwall if not damaged during relocation.
- Item 21** – Includes cost to place 42" sod strip along edge of pavement in mixed portion of the project and in areas directed by the engineer.
- Item 22** - Shall be placed at all disturbed areas not sodded, as directed by the engineer.
- Item 23** - Shall include striping the roadway back to existing layout and shall include stop bars at all stop conditions, centerline/edgeline striping (2 coats each), and RPM's throughout.

ALL ITEMS MAY BE INCREASED, DECREASED, OR OMITTED AS DIRECTED BY THE ENGINEER.


ALL MATERIALS AND CONSTRUCTION SHALL CONFORM TO BOTH THE REQUIREMENTS OF THE LATEST FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND THE LATEST FDOT DESIGN STANDARDS.

ALL INCIDENTAL WORK INCLUDED IN THESE ITEMS. ALL UNIT PRICE AND TOTAL SPACES MUST BE FILLED IN TO CORRELATE WITH EACH ITEM



Company Name: Anderson Columbia Co., Inc (SEAL)

Authorized Company Representative: 
Printed Name E. Tony Williams Jr., Vice President **Signature**

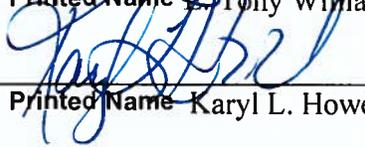Attested By: 
Printed Name Karyl L. Howell, Witness **Signature**

Total Bid Amount: 1,451,431.40

Date: March 21, 2016

COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS
PROJECT NUMBER 2016-04
NW SUWANNEE VALLEY RD – ROADWAY IMPROVEMENTS

BID PROPOSAL

THE UNDERSIGNED hereby propose to furnish all materials, labor and supervision for the construction of the subject project including conformance with the construction requirements and specifications for the following unit prices:

ITEM	UNIT	QUANTITY	UNIT PRICE	TOTAL	
1	Mobilization	LS	1	\$ 90,918	\$ 90,918
2	Maintenance of Traffic	LS	1	\$ 50,215	\$ 50,215
3	Staked Silt Fence	LF	500	\$ 2.00	\$ 1,000
4	Milling, 1 1/2"	SY	2,222	\$ 1.50	\$ 3,333
5	Mixing Existing Pavement	SY	56,356	\$ 1.70	\$ 95,805.20
6	Limerock Base, 4" (Loose Measure)	CY	6,256	\$ 22.40	\$ 140,134.40
7	Subsoil Excavation	CY	650	\$ 7.00	\$ 4,550
8	Borrow Material	CY	800	\$ 11.00	\$ 8,800
9	Grading and Finishing (Roadway & Shoulder)	LS	1	\$ 104,260	\$ 104,260
10	Asphaltic Concrete SP 12.5 @ 150 lb/sy	TN	4,879	\$ 96.50	\$ 470,823.50
11	Asphaltic Concrete SP 9.5 @ 110 lb/sy	TN	3,578	\$ 109.20	\$ 390,717.60
12	Pipe Culvert, RCP, Elliptical, 14" x 23", C/D	LF	96	\$ 85.20	\$ 8,179.20
13	Pipe Culvert, RCP, Elliptical, 19" x 30", C/D	LF	56	\$ 79.00	\$ 4,424
14	Pipe Culvert, RCP, Round, 30", (Extension)	LF	12	\$ 97.55	\$ 1,170.60
15	Pipe Culvert, CMP, Round, 48", (8 Extensions)	LF	96	\$ 102.00	\$ 9,792
16	Pipe Culvert, CMP, Round, 18" X 40', S/D	EA	5	\$ 1,500	\$ 7,500
17	Mitered End Section, Elliptical or Round, 18"	EA	14	\$ 560	\$ 7,840
18	Mitered End Section, Elliptical, 24"	EA	2	\$ 585	\$ 1,170
19	Concrete Endwall, Class I, Single 30"	EA	1	\$ 5,055	\$ 5,055
20	Concrete Endwall, Class I, Double 48"	EA	4	\$ 11,495	\$ 45,980
21	Sod Strip 42"	SY	19,725	\$ 2.25	\$ 44,381.25
22	Seed and Mulch	LS	1	\$ 12,490	\$ 12,490
23	Pavement Markings	LS	1	\$ 47,850	\$ 47,850

Contractor Signature :



TOTAL

1,556,388.75

PAY ITEM NOTES

Item 2 - Shall include all elements required per FDOT standards and include temporary centerline/stop bar delineation at all non working times, stationing, offsets, and any edge of pavement reclamation where required.

Item 3 - Shall be placed at all areas of potential stormwater runoff as directed by the Engineer.

Item 4 - Shall include removal of existing asphaltic concrete down to existing limerock base and then sweep existing limerock base for engineer visual inspection. Cores show +/- 1.5" of asphalt. Columbia County will retain ownership of millings. Contractor will deliver millings to Columbia County Public Works Site, off CR 25A, at Columbia County Parcel # 19-3S-17-05099-000.

Item 5 – Average depth shall be 10 inches and shall be achieved with a milling machine or engineer approved equivalent.

**COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS
PROJECT NUMBER 2016-04
NW SUWANNEE VALLEY RD – ROADWAY IMPROVEMENTS**

- Item 6** – Shall include 4" limerock, loose measure, placed by mechanical spreader before mixing begins.
- Item 9** – Includes all construction layouts required, scarifying, shaping, compacting, finishing, and priming for placement of asphalt and placement of sod.
- Item 12** – Quantity includes constructing (2) Pipe Culvert, RCP, Elliptical, 14" x 23", C/D @ 48 lf. Pipe length includes mitered end section pipe. Concrete portion of mitered ends will be paid for under **Item, 17 Mitered End Section, Elliptical or Round, 18", EA.**
- Item 13** – Quantity includes constructing (1) Pipe Culvert, RCP, Elliptical, 19" x 30", C/D @ 56 lf. Pipe length includes mitered end section pipe. Concrete portion of mitered ends will be paid for under **Item, 18 Mitered End Section, Elliptical, 24", EA.**
- Item 16** – Each side drain shall have mitered ends on each end. Pipe length includes mitered ends sections' pipe length for a total of 40 feet. Concrete portion of mitered ends will be paid for under **Item, 17 Mitered End Section, Elliptical or Round, 18", EA.**
- Item 19** – Contractor may elect to salvage existing endwall if not damaged during relocation.
- Item 21** – Includes cost to place 42" sod strip along edge of pavement in mixed portion of the project and in areas directed by the engineer.
- Item 22** - Shall be placed at all disturbed areas not sodded, as directed by the engineer.
- Item 23** - Shall include striping the roadway back to existing layout and shall include stop bars at all stop conditions, centerline/edgeline striping (2 coats each), and RPM's throughout.

ALL ITEMS MAY BE INCREASED, DECREASED, OR OMITTED AS DIRECTED BY THE ENGINEER.

ALL MATERIALS AND CONSTRUCTION SHALL CONFORM TO BOTH THE REQUIREMENTS OF THE LATEST FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND THE LATEST FDOT DESIGN STANDARDS.

ALL INCIDENTAL WORK INCLUDED IN THESE ITEMS. ALL UNIT PRICE AND TOTAL SPACES MUST BE FILLED IN TO CORRELATE WITH EACH ITEM

Company Name: Curt's Construction, Inc. (SEAL)

Authorized
Company
Representative:

Curtis Haynes
Printed Name

Curtis Haynes
Signature

Attested By:

Dana Haynes
Printed Name

Dana Haynes
Signature

Total Bid Amount:

\$ 1,556,388.75

Date:

3-21-16


COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS
PROJECT NUMBER 2016-04
NW SUWANNEE VALLEY RD – ROADWAY IMPROVEMENTS

BID PROPOSAL

THE UNDERSIGNED hereby propose to furnish all materials, labor and supervision for the construction of the subject project including conformance with the construction requirements and specifications for the following unit prices:

	ITEM	UNIT	QUANTITY	UNIT PRICE	TOTAL
1	Mobilization	LS	1	\$ 143,000	\$ 143,000
2	Maintenance of Traffic	LS	1	\$ 114,000	\$ 114,000
3	Staked Silt Fence	LF	500	\$ 2.00	\$ 1,000
4	Milling, 1 1/2"	SY	2,222	\$ 1.50	\$ 3,333
5	Mixing Existing Pavement	SY	56,356	\$ 1.10	\$ 61,991
6	Limerock Base, 4" (Loose Measure)	CY	6,256	\$ 26.00	\$ 162,656
7	Subsoil Excavation	CY	650	\$ 15.00	\$ 9,750
8	Borrow Material	CY	800	\$ 15.00	\$ 12,000
9	Grading and Finishing (Roadway & Shoulder)	LS	1	\$ 55,000	\$ 55,000
10	Asphaltic Concrete SP 12.5 @ 150 lb/sy	TN	4,879	\$ 93.00	\$ 453,747
11	Asphaltic Concrete SP 9.5 @ 110 lb/sy	TN	3,578	\$ 93.00	\$ 332,754
12	Pipe Culvert, RCP, Elliptical, 14" x 23", C/D	LF	96	\$ 65.00	\$ 6,240
13	Pipe Culvert, RCP, Elliptical, 19" x 30", C/D	LF	56	\$ 65.00	\$ 3,640
14	Pipe Culvert, RCP, Round, 30", (Extension)	LF	12	\$ 50.00	\$ 600.00
15	Pipe Culvert, CMP, Round, 48", (8 Extensions)	LF	96	\$ 50.00	\$ 4,800
16	Pipe Culvert, CMP, Round, 18" X 40', S/D	EA	5	\$ 700.00	\$ 3,500
17	Mitered End Section, Elliptical or Round, 18"	EA	14	\$ 395.00	\$ 5,530
18	Mitered End Section, Elliptical, 24"	EA	2	\$ 450.00	\$ 900.00
19	Concrete Endwall, Class I, Single 30"	EA	1	\$ 6,000	\$ 6,000
20	Concrete Endwall, Class I, Double 48"	EA	4	\$ 15,000	\$ 60,000
21	Sod Strip 42"	SY	19,725	\$ 2.25	\$ 44,381
22	Seed and Mulch	LS	1	\$ 19,208	\$ 19,208
23	Pavement Markings	LS	1	\$ 49,300	\$ 49,300

Contractor Signature : _____

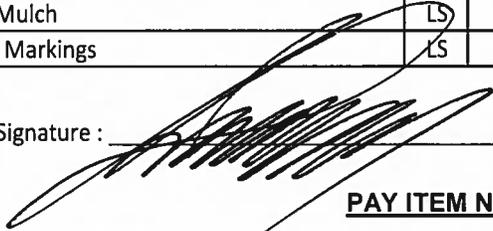

TOTAL 1,553,330.00

PAY ITEM NOTES

Item 2 - Shall include all elements required per FDOT standards and include temporary centerline/stop bar delineation at all non working times, stationing, offsets, and any edge of pavement reclamation where required.

Item 3 - Shall be placed at all areas of potential stormwater runoff as directed by the Engineer.

Item 4 - Shall include removal of existing asphaltic concrete down to existing limerock base and then sweep existing limerock base for engineer visual inspection. Cores show +/- 1.5" of asphalt. Columbia County will retain ownership of millings. Contractor will deliver millings to Columbia County Public Works Site, off CR 25A, at Columbia County Parcel # 19-3S-17-05099-000.

Item 5 – Average depth shall be 10 inches and shall be achieved with a milling machine or engineer approved equivalent.

**COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS
PROJECT NUMBER 2016-04
NW SUWANNEE VALLEY RD – ROADWAY IMPROVEMENTS**

- Item 6** – Shall include 4" limerock, loose measure, placed by mechanical spreader before mixing begins.
- Item 9** – Includes all construction layouts required, scarifying, shaping, compacting, finishing, and priming for placement of asphalt and placement of sod.
- Item 12** – Quantity includes constructing (2) Pipe Culvert, RCP, Elliptical, 14" x 23", C/D @ 48 lf. Pipe length includes mitered end section pipe. Concrete portion of mitered ends will be paid for under **Item, 17 Mitered End Section, Elliptical or Round, 18", EA.**
- Item 13** – Quantity includes constructing (1) Pipe Culvert, RCP, Elliptical, 19" x 30", C/D @ 56 lf. Pipe length includes mitered end section pipe. Concrete portion of mitered ends will be paid for under **Item, 18 Mitered End Section, Elliptical, 24", EA.**
- Item 16** – Each side drain shall have mitered ends on each end. Pipe length includes mitered ends sections' pipe length for a total of 40 feet. Concrete portion of mitered ends will be paid for under **Item, 17 Mitered End Section, Elliptical or Round, 18", EA.**
- Item 19** – Contractor may elect to salvage existing endwall if not damaged during relocation.
- Item 21** – Includes cost to place 42" sod strip along edge of pavement in mixed portion of the project and in areas directed by the engineer.
- Item 22** - Shall be placed at all disturbed areas not sodded, as directed by the engineer.
- Item 23** - Shall include striping the roadway back to existing layout and shall include stop bars at all stop conditions, centerline/edge line striping (2 coats each), and RPM's throughout.

ALL ITEMS MAY BE INCREASED, DECREASED, OR OMITTED AS DIRECTED BY THE ENGINEER.

ALL MATERIALS AND CONSTRUCTION SHALL CONFORM TO BOTH THE REQUIREMENTS OF THE LATEST FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND THE LATEST FDOT DESIGN STANDARDS.

ALL INCIDENTAL WORK INCLUDED IN THESE ITEMS. ALL UNIT PRICE AND TOTAL SPACES MUST BE FILLED IN TO CORRELATE WITH EACH ITEM

Company Name: CA Boone Construction Inc (SEAL)

Authorized Company Representative: James F. Boone
Printed Name

Attested By: Sherry Font
Printed Name

Total Bid Amount: 1,553,330.00

Date: March 21, 2016

(Signatures: James F. Boone, Sherry Font)