

Bid Tabulation
Columbia County, Florida
Board of County Commissioners

Date: 06/23/2020

Bid No: 2020-03

Project: SW Mt. Carmel Avenue and SW Troy Street

Company Name	Bid Amount
Anderson Columbia Co., Inc.	\$ 1,121,657.12
C.A. Boone Construction, Inc.	\$ 1,223,311.00

COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS

PROJECT NUMBER 2020-03


SW Mt. Carmel Ave. and SW Troy Str.

BID PROPOSAL

THE UNDERSIGNED hereby propose to furnish all materials, labor and supervision for the construction of the subject project including conformance with the construction requirements and specifications for the following unit prices:

ITEM	UNIT	QUANTITY	UNIT COST	TOTAL	
1	Mobilization	LS	1	85,798.20	85,798.20
2	Maintenance of Traffic	LS	1	58,255.80	58,255.80
3	Silt Fence	LF	1200	3.07	3,684.00
4	Borrow	CY	430	24.39	10,487.70
5	Subsoil Excavation	CY	1915	25.26	48,372.90
6	Limerock Material	TN	4339	14.72	63,870.08
7	Milling Existing Pavement - +/- 1"	SY	21062	1.65	34,752.30
8	Mixing Existing Pavement, 10" Depth	SY	21136	1.59	33,606.24
9	Levelling, reworking, finishing milled section	SY	18532	2.86	53,001.52
10	Finishing FDR base and shoulder	SY	24841	1.77	43,968.57
11	Asphaltic Conc. SP 12.5 structural	TN	3433	91.44	313,913.52
12	Asphaltic Conc. SP 9.5 surface	TN	2861	96.84	277,059.24
13	Miscellaneous Asphalt Pavement	TN	10	415.68	4,156.80
14	Seed and Mulch	LS	1	8,507.55	8,507.55
15	Sod - 42"	SY	6657	2.47	16,442.79
16	Retroreflective Pavement Markings	EA	1179	4.50	5,305.50
17	Painted Pavement Markings	LS	1	22,736.87	22,736.87
18	Crossdrain - 18" RCP	LF	144	59.79	8,609.76
19	Crossdrain - 24" RCP	LF	96	97.71	9,380.16
20	MES 24"	EA	4	1,248.71	4,994.84
21	MES 18"	EA	6	938.21	5,629.26
22	Guardrail - Roadway, General TL-2	LF	100	30.82	3,082.00
23	Guardrail - Guardrail, End Anchorage Assembly, Type II	EA	4	1,109.68	4,438.72
24	Handrail - Aluminum Pipe	LF	20	80.14	1,602.80
			TOTAL BID:	\$1,121,657.12	

Contractor Name (PRINT): Anderson Columbia Co., Inc.

Contractor Signature: 
 E. Tony Williams, Jr., P.E.
 Vice President

**COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS
PROJECT NUMBER 2020-03
SW Mt. Carmel Ave. and SW Troy Str.**

PAY ITEM NOTES

- Item 2** Shall include all elements required per FDOT standards and include temporary centerline/stop bar delineation at all non working times, stationing/offsets, and any edge of pavement reclamation where required.
- Item 3** Shall be placed at all areas of potential stormwater runoff as directed by the Engineer.
- Item 4** Shall be placed on shoulder at direction of engineer to provide a safe edge of pavement condition
- Item 5** Item includes cost to remove 2' of unsuitable material and replace with suitable fill in 6" lifts meeting density requirements
- Item 6** Shall include limerock placed by mechanical spreader with adjustable screed to monitor and verify the limerock mat thickness before mixing begins. Limerock shall have a target spread rate of 350 lbs/SY and should be monitored by qualified QC Personnel
- Item 7** Average depth shall be 1.25 inch and shall be achieved with a milling machine or engineer approved equivalent. Millings shall be delivered to Columbia County Public Works Material Yard. Please see attached map.
- Item 8** Average depth shall be 10 inches and shall be achieved with a milling machine or engineer approved equivalent.
- Item 9** After surface is milled, engineer will inspect limerock base to decide if base requires reworking and/or thickening.
- Item 10** Includes all construction layouts required, scarifying, shaping, shoulder clipping, compacting, finishing, and priming for placement of asphalt and sod. Any excess material along shoulder may require relocation at engineer's direction
- Item 11** Includes placement of SP 12.5 @ +/-165 lb/sy.
- Item 12** Includes placement of SP 9.5 @ +/-137.5 lb/sy. To maintain level access to driveways, an apron may be required at certain driveway locations and will be paid for under this item.
- Item 13** Shall be placed at guardrail location, as directed by the engineer.
- Item 14** Shall be placed at all disturbed areas not sodded, as directed by the engineer.
- Item 15** Includes cost to place 42" sod strip along edge of pavement and in areas directed by the engineer.
- Item 17** Shall include striping the roadway back to existing layout and shall include stop bars at all stop conditions, centerline/edgeline striping (2 coats each)
- Item 18** Includes cost to place stormwater pipe. Length includes mitered end section.
- Item 19** Includes cost to place stormwater pipe. Length includes mitered end section.
- Item 22** Includes all material to construct TL-2 Guardrail and demolition of existing guardrail. Special care shall be taken to preserve guardrail panels to be provided to Columbia County

- **ALL ITEMS MAY BE INCREASED, DECREASED, OR OMITTED AS DIRECTED BY THE ENGINEER.**
- **ALL MATERIALS AND CONSTRUCTION SHALL CONFORM TO BOTH THE REQUIREMENTS OF THE LATEST FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND THE LATEST FDOT DESIGN STANDARDS.**
- **ALL INCIDENTAL WORK INCLUDED IN THESE ITEMS. ALL UNIT PRICE AND TOTAL SPACES MUST BE FILLED IN TO CORRELATE WITH EACH ITEM**



Company Name: Anderson Columbia Co., Inc.

**Authorized
Company
Representative:**

E. Tony Williams, Jr.

Printed Name E. Tony Williams, Jr., P. E., Vice President

Signature

Attested By:

Larry L. Howell

Printed Name Larry L. Howell

Signature

Total Bid Amount: \$1,121,657.12

Date: June 23, 2020

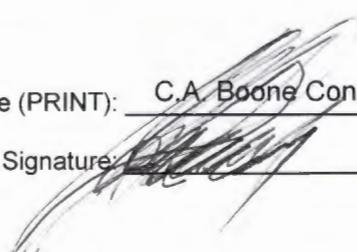
COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS
PROJECT NUMBER 2020-03
SW Mt. Carmel Ave. and SW Troy Str.

BID PROPOSAL

THE UNDERSIGNED hereby propose to furnish all materials, labor and supervision for the construction of the subject project including conformance with the construction requirements and specifications for the following unit prices:

	ITEM	UNIT	QUANTITY	UNIT COST	TOTAL
1	Mobilization	LS	1	\$103,000.00	\$103,000.00
2	Maintenance of Traffic	LS	1	\$ 83,000.00	\$ 83,000.00
3	Silt Fence	LF	1200	\$2.50	\$ 3,000.00
4	Borrow	CY	430	\$ 14.00	\$ 6,020.00
5	Subsoil Excavation	CY	1915	\$ 26.00	\$ 49,790.00
6	Limerock Material	TN	4339	\$17.50	\$75,392.50
7	Milling Existing Pavement - +/- 1"	SY	21062	\$ 1.50	\$ 31,593.00
8	Mixing Existing Pavement, 10" Depth	SY	21136	\$ 2.00	\$ 42,272.00
9	Levelling, reworking, finishing milled section	SY	18532	\$1.50	\$ 27,798.00
10	Finishing FDR base and shoulder	SY	24841	\$ 2.00	\$ 49,682.00
11	Asphaltic Conc. SP 12.5 structural	TN	3433	\$103.00	\$353,599.00
12	Asphaltic Conc. SP 9.5 surface	TN	2861	\$103.00	\$294,683.00
13	Miscellaneous Asphalt Pavement	TN	10	\$ 300.00	\$ 3,000.00
14	Seed and Mulch	LS	1	\$6,870.00	\$ 6,870.00
15	Sod - 42"	SY	6657	\$ 2.00	\$ 13,314.00
16	Retroreflective Pavement Markings	EA	1179	\$ 4.50	\$5,305.50
17	Painted Pavement Markings	LS	1	\$ 33,000.00	\$ 33,000.00
18	Crossdrain - 18" RCP	LF	144	\$ 56.00	\$ 8,064.00
19	Crossdrain - 24" RCP	LF	96	\$ 73.00	\$ 7,008.00
20	MES 24"	EA	4	\$750.00	\$ 3,000.00
21	MES 18"	EA	6	\$ 650.00	\$ 3,900.00
22	Guardrail - Roadway, General TL-2	LF	100	\$ 53.00	\$ 5,300.00
23	Guardrail - Guardrail, End Anchorage Assembly, Type II	EA	4	\$ 2,800.00	\$11,200.00
24	Handrail - Aluminum Pipe	LF	20	\$ 150.00	\$ 3,000.00
				TOTAL BID:	\$1,223,331.00

Contractor Name (PRINT): C.A. Boone Construction, Inc

Contractor Signature: 

**COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS
PROJECT NUMBER 2020-03
SW Mt. Carmel Ave. and SW Troy Str.**

PAY ITEM NOTES

- Item 2** Shall include all elements required per FDOT standards and include temporary centerline/stop bar delineation at all non working times, stationing/offsets, and any edge of pavement reclamation where required.
- Item 3** Shall be placed at all areas of potential stormwater runoff as directed by the Engineer.
- Item 4** Shall be placed on shoulder at direction of engineer to provide a safe edge of pavement condition
- Item 5** Item includes cost to remove 2' of unsuitable material and replace with suitable fill in 6" lifts meeting density requirements
- Item 6** Shall include limerock placed by mechanical spreader with adjustable screed to monitor and verify the limerock mat thickness before mixing begins. Limerock shall have a target spread rate of 350 lbs/SY and should be monitored by qualified QC Personnel
- Item 7** Average depth shall be 1.25 inch and shall be achieved with a milling machine or engineer approved equivalent. Millings shall be delivered to Columbia County Public Works Material Yard. Please see attached map.
- Item 8** Average depth shall be 10 inches and shall be achieved with a milling machine or engineer approved equivalent.
- Item 9** After surface is milled, engineer will inspect limerock base to decide if base requires reworking and/or thickening.
- Item 10** Includes all construction layouts required, scarifying, shaping, shoulder clipping, compacting, finishing, and priming for placement of asphalt and sod. Any excess material along shoulder may require relocation at engineer's direction
- Item 11** Includes placement of SP 12.5 @ +/-165 lb/sy.
- Item 12** Includes placement of SP 9.5 @ +/-137.5 lb/sy. To maintain level access to driveways, an apron may be required at certain driveway locations and will be paid for under this item.
- Item 13** Shall be placed at guardrail location, as directed by the engineer.
- Item 14** Shall be placed at all disturbed areas not sodded, as directed by the engineer.
- Item 15** Includes cost to place 42" sod strip along edge of pavement and in areas directed by the engineer.
- Item 17** Shall include striping the roadway back to existing layout and shall include stop bars at all stop conditions, centerline/edgeline striping (2 coats each)
- Item 18** Includes cost to place stormwater pipe. Length includes mitered end section.
- Item 19** Includes cost to place stormwater pipe. Length includes mitered end section.
- Item 22** Includes all material to construct TL-2 Guardrail and demolition of existing guardrail. Special care shall be taken to preserve guardrail panels to be provided to Columbia County

- **ALL ITEMS MAY BE INCREASED, DECREASED, OR OMITTED AS DIRECTED BY THE ENGINEER.**
- **ALL MATERIALS AND CONSTRUCTION SHALL CONFORM TO BOTH THE REQUIREMENTS OF THE LATEST FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND THE LATEST FDOT DESIGN STANDARDS.**
- **ALL INCIDENTAL WORK INCLUDED IN THESE ITEMS. ALL UNIT PRICE AND TOTAL SPACES MUST BE FILLED IN TO CORRELATE WITH EACH ITEM**


Company Name: C.A.Boone Construction, Inc

Authorized
Company
Representative: James F. Boone, President
Printed Name

Attested By: Sherry Font, Secretary
Printed Name

Total Bid Amount: \$1,223,331.00

Date: June 20, 2020



(Handwritten signature of James F. Boone)
Signature

(Handwritten signature of Sherry Font)
Signature